



Ficha técnica




Arriostramiento para soportes inclinados

S08

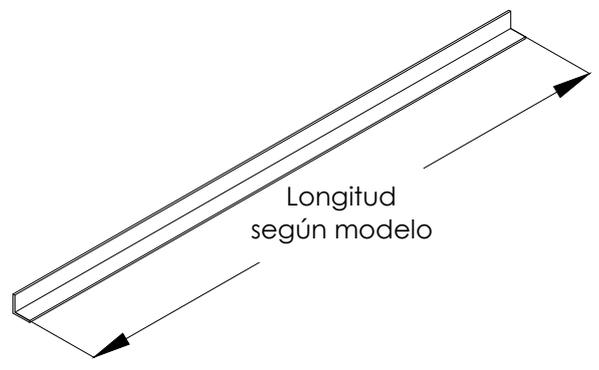

Disposiciones S08 según nº de pórticos

Compatibilidad: 09V - 09H - 11V - 11H - 12V - 13V - 19H - 20H - 21H - 22V - 19.1H - 20.1H - 22H - 24H - 25H - 40V - 42V

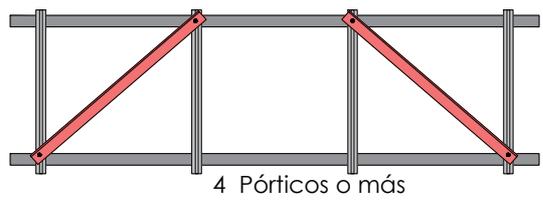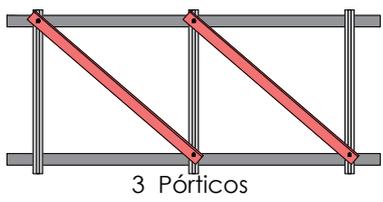


Soportes compatibles con el S08

Soporte	Longitud (mm)
19H - 20H - 21H - 22V	1600
08V - 09V - 10V - 11V - 12V - 13V - 19.1H - 20.1H - 24H - 25H	1900
09H - 11H - 40V	2200
22H	2400
42V	2600



Materiales: Perfilería de aluminio EN AW 6005A T6

Seguridad:

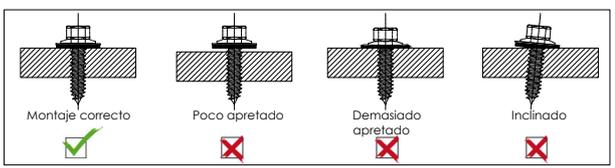

Par de apriete:
 Tornillo 6,3 Hexagonal 10 Nm



Marcado ES19/86524 CE

Reservado el derecho a efectuar modificaciones. Las ilustraciones de productos son a modo de ejemplo y pueden diferir del original.